


# SIRCO

Load break switches for power distribution from 125 to 5000 A

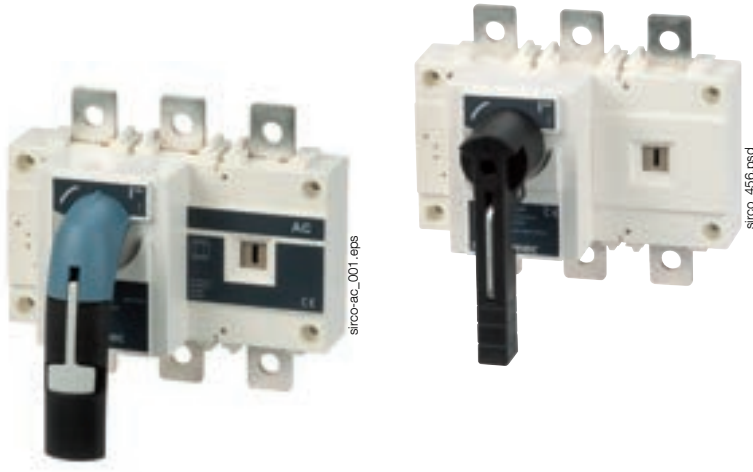

## Functions

SIRCO and SIRCO AC are manually operated multipolar load break switches. They make and break under load conditions and provide safety isolation. SIRCO are designed for 415 VAC and DC low voltage electrical circuits. SIRCO AC are designed for harsh applications up to 1000 VAC - AC 23.

## Advantages

### Reliability and performance

The double breaking per pole, achieved through its sliding contact system, is a proven design that offers very high durability and short-circuit withstand. The quick opening and rapid closure, combined with specifically designed arcing chambers, provides SIRCO AC with improved breaking performance.

### Safety of property and personnel

The position indicator is located directly on the sliding contact system, ensuring it can be seen in all circumstances. The use of glass fibre reinforced polyester gives the SIRCO both high mechanical and thermal resistance.

### Simplicity

A common range of accessories to meet all types of applications:

- Simple mounting.
- Simplified stock management and reduced storage costs.

### Easy to install

Terminal design allows the connection of all types of conductors (cables, copper bars):

- Sufficient distance between terminals to facilitate connections.
- Connection up to 6 x 185 mm<sup>2</sup>.
- Connection accessories which facilitate both flat and edgewise connections.

## The solution for

- > Data centres
- > Healthcare
- > Energy
- > Infrastructure & Transport
- > Industry
- > Buildings



## Strong points

- > Reliability and performance
- > Safety of property and personnel
- > Simplicity
- > Easy to install

## Conformity to standards

- > IEC 60947-3



## Approvals and certifications<sup>(1)</sup>



<sup>(1)</sup> Product references on request.

## Sustainable advantages

- > Robust design, using durable and stable materials to maximise product lifetime.
- > Tested beyond market standards to maximise product lifetime - even in severe operating environments.
- > RoHS & REACH compliant

## General characteristics

- Double positive break indication given through a position indication window, located directly on the product, and by the operating handle.
- Severe load duty categories (AC-22 and AC-23).
- High resistance to damp heat (supplied 'tropicalised').


## What you need to know

- In front **direct** or **external** operation, SIRCO is available in 3 and 4-pole versions from 125 to 5000 A.
- It can be ordered in 6 or 8-pole versions from 125 to 1600 A.
- SIRCO are available in a polyester or sheet metal enclosure from 160 to 1600 A.




For ratings 2000, 2500 and 3200A, a copper **bar connection kit** enables the connection between the two power terminals of one pole.

**Flat connection**  
top or bottom

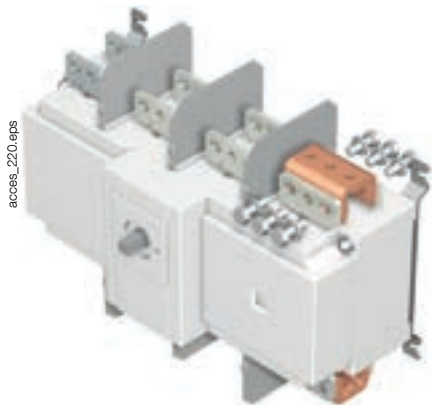

**Edgewise connection**  
top or bottom

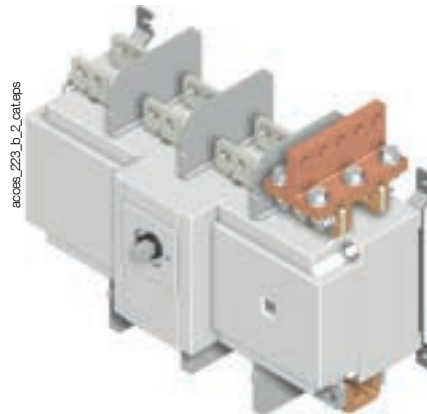

# SIRCO

Load break switches for power distribution  
from 125 to 5000 A

## SIRCO References

### Standard applications - Front operation - 3 and 4-pole

Rating (A) / Frame size	No. of poles	Switch body <sup>(1)</sup>	Direct handle	External handle	Shaft for external operation	Auxiliary contact	Terminal shrouds	Terminal screens				
125 A / B3	3 P	2600 <b>3014</b>	J0 type Black 1102 <b>1111</b> <sup>(2)</sup>	S2 type Black IP55 1421 <b>2111</b> <sup>(2)</sup> Black IP65 1423 <b>2111</b> Red IP65 1424 <b>2111</b>	200 mm 1400 <b>1020</b> 320 mm 1400 <b>1032</b> <sup>(2)</sup> 500 mm 1400 <b>1050</b> Shaft guide <sup>(5)</sup> 1429 <b>0000</b>	1st NO/NC contact 2699 <b>0031</b> 2nd NO/NC contact 2699 <b>0032</b>	3 P	3 P				
	4 P	2600 <b>4014</b>					2694 <b>3014</b> <sup>(3)</sup>	2698 <b>3012</b> <sup>(3)</sup>				
160 A / B3	3 P	2600 <b>3017</b>					2694 <b>4014</b> <sup>(3)</sup>	2698 <b>4012</b> <sup>(3)</sup>				
	4 P	2600 <b>4017</b>										
200 A / B4	3 P	2600 <b>3021</b>	J1 type Black 1112 <b>1111</b> Red 1113 <b>1111</b>		S4 type Black IP65 1443 <b>3111</b> <sup>(2)</sup> Red IP65 1444 <b>3111</b>		200 mm 1401 <b>1520</b> 320 mm 1401 <b>1532</b> <sup>(2)</sup> 400 mm 1401 <b>1540</b> Shaft guide <sup>(5)</sup> 1429 <b>0000</b>	1st NO/NC contact 2699 <b>0031</b> 2nd NO/NC contact 2699 <b>0032</b>	3 P	3 P		
	4 P	2600 <b>4021</b>							2694 <b>3021</b> <sup>(3)</sup>	2698 <b>3020</b> <sup>(3)</sup>		
250 A / B4	3 P	2600 <b>3026</b>							2694 <b>4021</b> <sup>(3)</sup>	2698 <b>4020</b> <sup>(3)</sup>		
	4 P	2600 <b>4026</b>										
315 A / B5	3 P	2600 <b>3032</b>	J4 type Blue 1142 <b>1111</b> <sup>(2)</sup> Red 1143 <b>1111</b>				V2 type Black IP65 2799 <b>7136</b> <sup>(2)</sup> Red IP65 2799 <b>7134</b>		200 mm 2799 <b>3015</b> 320 mm 2799 <b>3018</b> <sup>(2)</sup> 450 mm 2799 <b>3019</b>	1st/2nd contact NO/NC included	3 P	3 P
	4 P	2600 <b>4032</b>									2694 <b>3051</b> (3)	2698 <b>3050</b> <sup>(3)</sup>
400 A / B5	3 P	2600 <b>3041</b>		2694 <b>4051</b> <sup>(3)</sup>		2698 <b>4050</b> <sup>(3)</sup>						
	4 P	2600 <b>4041</b>										
500 A / B5	3 P	2600 <b>3051</b>	J5 type Black 2799 <b>7042</b> <sup>(2)</sup>	Type V0 Black 2799 <b>7155</b> <sup>(2)</sup>		200 mm 2799 <b>3015</b> 320 mm 2799 <b>3018</b> <sup>(2)</sup> 450 mm 2799 <b>3019</b>			1st/2nd contact NO/NC included		3 P	3 P
	4 P	2600 <b>4051</b>									2694 <b>3051</b> (3)	2698 <b>3050</b> <sup>(3)</sup>
630 A / B5	3 P	2600 <b>3064</b>			2694 <b>4051</b> <sup>(3)</sup>			2698 <b>4050</b> <sup>(3)</sup>				
	4 P	2600 <b>4064</b>										
800 A / B6	3 P	2600 <b>3081</b>	J4 type Blue 1142 <b>1111</b> <sup>(2)</sup> Red 1143 <b>1111</b>		Type V0 Black 2799 <b>7155</b> <sup>(2)</sup>	200 mm 1401 <b>1520</b> 320 mm 1401 <b>1532</b> <sup>(2)</sup> 400 mm 1401 <b>1540</b> Shaft guide <sup>(5)</sup> 1429 <b>0000</b>		1st NO/NC contact 2699 <b>0031</b> 2nd NO/NC contact 2699 <b>0032</b>			3 P	3 P
	4 P	2600 <b>4081</b>									2694 <b>3081</b> <sup>(3)</sup>	2698 <b>3080</b> <sup>(3)</sup>
1000 A / B6	3 P	2600 <b>3099</b>					2694 <b>4099</b> <sup>(3)</sup>			2698 <b>4080</b> <sup>(3)</sup>		
	4 P	2600 <b>4099</b>										
CD 1250 A / B6	3 P	2600 <b>3119</b>	J4 type Blue 1142 <b>1111</b> <sup>(2)</sup> Red 1143 <b>1111</b>			Type V0 Black 2799 <b>7155</b> <sup>(2)</sup>	200 mm 1401 <b>1520</b> 320 mm 1401 <b>1532</b> <sup>(2)</sup> 400 mm 1401 <b>1540</b> Shaft guide <sup>(5)</sup> 1429 <b>0000</b>			1st NO/NC contact 2699 <b>0031</b> 2nd NO/NC contact 2699 <b>0032</b>	3 P	3 P
	4 P	2600 <b>4119</b>									2694 <b>3120</b> <sup>(3)</sup>	2698 <b>3120</b> <sup>(3)</sup>
1250 A / B7	3 P	2600 <b>3121</b>		2694 <b>4121</b> <sup>(3)</sup>					2698 <b>4120</b> <sup>(3)</sup>			
	4 P	2600 <b>4121</b>										
1600 A / B7	3 P	2600 <b>3161</b>	J4 type Blue 1142 <b>1111</b> <sup>(2)</sup> Red 1143 <b>1111</b>	Type V0 Black 2799 <b>7155</b> <sup>(2)</sup>			200 mm 2799 <b>3015</b> 320 mm 2799 <b>3018</b> <sup>(2)</sup> 450 mm 2799 <b>3019</b>		1st/2nd contact NO/NC included		3 P	3 P
	4 P	2600 <b>4161</b>									2694 <b>3120</b> <sup>(3)</sup>	2698 <b>3120</b> <sup>(3)</sup>
1800 A / B7	3 P	2600 <b>3181</b>			2694 <b>4121</b> <sup>(3)</sup>			2698 <b>4120</b> <sup>(3)</sup>				
	4 P	2600 <b>4181</b>										
2000 A / B8 <sup>(4)</sup>	3 P	2600 <b>3200</b>	J5 type Black 2799 <b>7042</b> <sup>(2)</sup>		Type V0 Black 2799 <b>7155</b> <sup>(2)</sup>		200 mm 2799 <b>3015</b> 320 mm 2799 <b>3018</b> <sup>(2)</sup> 450 mm 2799 <b>3019</b>	1st/2nd contact NO/NC included			3 P	3 P
	4 P	2600 <b>4200</b>									2694 <b>3200</b> <sup>(3)</sup>	2698 <b>3200</b> <sup>(3)</sup>
2500 A / B8 <sup>(4)</sup>	3 P	2600 <b>3250</b>				2694 <b>4200</b> <sup>(3)</sup>				2698 <b>4200</b> <sup>(3)</sup>		
	4 P	2600 <b>4250</b>										
3200 A / B8 <sup>(4)</sup>	3 P	2600 <b>3320</b>	Type V0 Black 2799 <b>7072</b> <sup>(2)</sup>			Type V0 Black 2799 <b>7155</b> <sup>(2)</sup>	200 mm 2799 <b>3015</b> 320 mm 2799 <b>3018</b> <sup>(2)</sup> 450 mm 2799 <b>3019</b>			1st/2nd contact NO/NC included	3 P	3 P
	4 P	2600 <b>4320</b>									2694 <b>3200</b> <sup>(3)</sup>	2698 <b>3200</b> <sup>(3)</sup>
4000 A / B9	3 P	2600 <b>3401</b>		2694 <b>4200</b> <sup>(3)</sup>					2698 <b>4200</b> <sup>(3)</sup>			
	4 P	2600 <b>4401</b>										
5000 A / B9	3 P	2600 <b>3500</b>	Type V0 Black 2799 <b>7072</b> <sup>(2)</sup>	Type V0 Black 2799 <b>7155</b> <sup>(2)</sup>			200 mm 2799 <b>3015</b> 320 mm 2799 <b>3018</b> <sup>(2)</sup> 450 mm 2799 <b>3019</b>		1st/2nd contact NO/NC included		3 P	3 P
	4 P	2600 <b>4500</b>									2694 <b>3200</b> <sup>(3)</sup>	2698 <b>3200</b> <sup>(3)</sup>

(1) Device available enclosed (see "Enclosed load break switches")

(2) Standard.

(3) Top or bottom.

(4) Connection kit necessary.

(5) Recommended for a shaft length over 320 mm.

## SIRCO AC References

### Harsh applications - Front operation - 3 and 4-pole

Rating (A) / Frame size	No. of poles	Switch body <sup>(1)</sup>	Direct handle	External handle	Shaft for external operation	Auxiliary contact	Terminal shrouds	Terminal screens		
200 A / B4	3 P	26AC <b>3020</b>	J1 type Black 1112 <b>1111</b> <sup>(1)</sup> J1 type Red 1113 <b>1111</b>	S2 type Black IP55 1421 <b>2111</b> <sup>(1)</sup> Black IP65 1423 <b>2111</b> Red IP65 1424 <b>2111</b>	200 mm 1400 <b>1020</b> 320 mm 1400 <b>1032</b> <sup>(1)</sup> 500 mm 1400 <b>1050</b>		3P 2694 <b>3021</b> <sup>(2)(3)</sup> 4 P 2694 <b>4021</b> <sup>(2)(3)</sup>	3P 2698 <b>3020</b> <sup>(3)</sup> 4 P 2698 <b>4020</b> <sup>(3)</sup>		
	4 P	26AC <b>4020</b>								
250 A / B4	3 P	26AC <b>3025</b>								
	4 P	26AC <b>4025</b>								
315 A / B4	3 P	26AC <b>3031</b>								
	4 P	26AC <b>4031</b>								
400 A / B5	3 P	26AC <b>3040</b>			J4 type Blue 1142 <b>1111</b> <sup>(1)</sup> Red 1143 <b>1111</b>	S4 type Black IP65 1443 <b>3111</b> <sup>(1)</sup> Red IP65 1444 <b>3111</b>	Shaft guide <sup>(5)</sup> 1429 <b>0000</b>	1st NO/NC contact 2699 <b>0031</b> 2nd NO/NC contact 2699 <b>0032</b>	3P 2694 <b>3051</b> <sup>(2)(3)</sup> 4 P 2694 <b>4051</b> <sup>(2)(3)</sup>	3P 2698 <b>3050</b> <sup>(3)</sup> 4 P 2698 <b>4050</b> <sup>(3)</sup>
	4 P	26AC <b>4040</b>								
500 A / B5	3 P	26AC <b>3050</b>								
	4 P	26AC <b>4050</b>								
CD 630 A / B5	3 P	26AC <b>3063</b>								
	4 P	26AC <b>4063</b>								
630 A / B6	3 P	26AC <b>3064</b>								
	4 P	26AC <b>4064</b>								
800 A / B6	3 P	26AC <b>3080</b>								
	4 P	26AC <b>4080</b>								
1000 A / B6	3 P	26AC <b>3100</b>								
	4 P	26AC <b>4100</b>								
CD 1250 A / B6	3 P	26AC <b>3120</b>								
	4 P	26AC <b>4120</b>								
1250 A / B7	3 P	26AC <b>3121</b>								
	4 P	26AC <b>4121</b>								
1600 A / B7	3 P	26AC <b>3160</b>								
	4 P	26AC <b>4160</b>								
2000 A / B8 <sup>(4)</sup>	3 P	26AC <b>3200</b>	S5 type Black 2799 <b>7042</b> <sup>(1)</sup>	S5 type Black IP65 1453 <b>8111</b> <sup>(1)</sup>	200 mm 2799 <b>3015</b> 320 mm 2799 <b>3018</b> <sup>(1)</sup> 450 mm 2799 <b>3019</b>		3P 2698 <b>3120</b> <sup>(2)(3)</sup> 4 P 2698 <b>4120</b> <sup>(2)(3)</sup>	3 P 2698 <b>3200</b> <sup>(2)(3)</sup> 4 P 2698 <b>4200</b> <sup>(2)(3)</sup>		
	4 P	26AC <b>4200</b>								

(1) Standard.

(2) Mandatory for voltage greater than 415 VAC.

(3) Top or bottom.

(4) Connection kit necessary.

(5) Recommended for a shaft length over 320 mm.

# SIRCO

Load break switches for power distribution

from 125 to 5000 A

## SIRCO References

### Standard applications - Front operation - 6 and 8-pole

Rating (A) / Frame size	No. of poles	Switch body <sup>(1)</sup>	Direct handle	External handle	Shaft for external operation	Auxiliary contact	Terminal shrouds	Terminal screens
125 A / B3DS	6 P	2601 <b>6013</b>	J2 type Black 1122 <b>1111</b> <sup>(1)</sup> Red 1123 <b>1111</b>	S2 type Black IP55 1421 <b>2111</b> <sup>(1)</sup> Red IP65 1424 <b>2111</b>	200 mm 1400 <b>1020</b> 320 mm 1400 <b>1032</b> <sup>(1)</sup>		6 P 2694 <b>3014</b> <sup>(2)(3)</sup> 8 P 2694 <b>4014</b> <sup>(2)(3)</sup>	6 P 1509 <b>3012</b> <sup>(4)</sup> 8 P 1509 <b>4012</b> <sup>(4)</sup>
	8 P	2601 <b>8013</b>						
160 A / B3DS	6 P	2601 <b>6016</b>						
	8 P	2601 <b>8016</b>						
250 A / B4DS	6 P	2601 <b>6025</b>					6 P 2694 <b>3021</b> <sup>(2)(3)</sup> 8 P 2694 <b>4021</b> <sup>(2)(3)</sup>	6 P 1509 <b>3025</b> <sup>(4)</sup> 8 P 1509 <b>4025</b> <sup>(4)</sup>
	8 P	2601 <b>8025</b>						
400 A / B5DS	6 P	2601 <b>6040</b>	J3 type Black 1132 <b>1111</b> <sup>(1)</sup> Red 1133 <b>1111</b>	S4 type Black IP65 1443 <b>3111</b> <sup>(1)</sup> Red IP65 1444 <b>3111</b>	200 mm 1401 <b>1520</b> 320 mm 1401 <b>1532</b> <sup>(1)</sup>		6 P 2694 <b>3051</b> <sup>(2)(3)</sup> 8 P 2694 <b>4051</b> <sup>(2)(3)</sup>	6 P 1509 <b>3063</b> <sup>(4)</sup> 8 P 1509 <b>4063</b> <sup>(4)</sup>
	8 P	2601 <b>8040</b>						
630 A / B5DS	6 P	2601 <b>6063</b>				1 <sup>st</sup> NO/NC contact 2699 <b>0061</b> 2 <sup>nd</sup> NO/NC contact 2699 <b>0062</b>		
	8 P	2601 <b>8063</b>						
800 A / B6DS	6 P	2601 <b>6080</b>						
	8 P	2601 <b>8080</b>						
1000 A / B6DS	6 P	2601 <b>6100</b>	J4 type Blue 1142 <b>1111</b> <sup>(2)</sup> Red 1143 <b>1111</b>	Type V1 Black IP65 2799 <b>7145</b> <sup>(1)</sup>	320 mm 2799 <b>3018</b> <sup>(1)</sup>			6 P 1509 <b>3080</b> <sup>(4)</sup> 8 P 1509 <b>4080</b> <sup>(4)</sup>
	8 P	2601 <b>8100</b>						
1250 A / B7DS	6 P	2601 <b>6120</b>						
	8 P	2601 <b>8120</b>						
1600 A / B7DS	6 P	2601 <b>6160</b>						6 P 1509 <b>3160</b> <sup>(4)</sup> 8 P 1509 <b>4160</b> <sup>(4)</sup>
	8 P	2601 <b>8160</b>						

(1) Standard.

(2) Top or bottom on the front or rear of the device.

(3) Select 2 sets for front or rear.

(4) Top or bottom on the front or rear of the device.

## SIRCO References (continued)

### Standard applications - Right side external operation

Rating (A) / Frame size	No. of poles	Switch body <sup>(1)</sup>	Direct handle	External handle	Auxiliary contact	Terminal shrouds	Terminal screens												
160 A / B3	3 P	2605 3017	S2 type Black IP65 1425 2111 <sup>(1)</sup> Black IP65 1427 2111 Red IP65 1428 2111	200 mm 1400 1020 250 mm 1400 1025 320 mm 1400 1032 <sup>(1)</sup>	1 <sup>st</sup> NO/NC contact 2699 0031 2 <sup>nd</sup> NO/NC contact 2699 0032	3 P 2694 3014 <sup>(2)</sup> 4 P 2694 4014 <sup>(2)</sup>	3 P 2698 3012 <sup>(2)</sup> 4 P 2698 4012 <sup>(2)</sup>												
	4 P	2605 4017				3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 2698 3020 <sup>(2)</sup> 4 P 2698 4020 <sup>(2)</sup>												
200 A / B4	3 P	2605 3021				S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 2698 3020 <sup>(2)</sup> 4 P 2698 4020 <sup>(2)</sup>									
	4 P	2605 4021							3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 2698 3050 <sup>(2)</sup> 4 P 2698 4050 <sup>(2)</sup>									
250 A / B4	3 P	2605 3026							S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 2698 3020 <sup>(2)</sup> 4 P 2698 4020 <sup>(2)</sup>						
	4 P	2605 4026										3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 2698 3050 <sup>(2)</sup> 4 P 2698 4050 <sup>(2)</sup>						
315 A / B5	3 P	2605 3032										S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 2698 3020 <sup>(2)</sup> 4 P 2698 4020 <sup>(2)</sup>			
	4 P	2605 4032													3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 2698 3050 <sup>(2)</sup> 4 P 2698 4050 <sup>(2)</sup>			
400 A / B5	3 P	2605 3041													S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 2698 3020 <sup>(2)</sup> 4 P 2698 4020 <sup>(2)</sup>
	4 P	2605 4041																3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 2698 3050 <sup>(2)</sup> 4 P 2698 4050 <sup>(2)</sup>
500 A / B5	3 P	2605 3051	S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-													3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 2698 3020 <sup>(2)</sup> 4 P 2698 4020 <sup>(2)</sup>
	4 P	2605 4051																3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 2698 3050 <sup>(2)</sup> 4 P 2698 4050 <sup>(2)</sup>
630 A / B5	3 P	2605 3064				S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-										3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 2698 3020 <sup>(2)</sup> 4 P 2698 4020 <sup>(2)</sup>
	4 P	2605 4064																3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 2698 3050 <sup>(2)</sup> 4 P 2698 4050 <sup>(2)</sup>
800 A / B6	3 P	2605 3081							S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-							3 P 2698 3080 <sup>(2)</sup> 4 P 2698 4080 <sup>(2)</sup>	
CD 1250 A / B6	3 P	2605 3119																3 P 2698 3120 <sup>(2)</sup> 4 P 2698 4120 <sup>(2)</sup>	
	4 P	2605 4119										3 P 2698 3120 <sup>(2)</sup> 4 P 2698 4120 <sup>(2)</sup>							
1800 A / B7	3 P	2605 3181										S4 type Black IP65 1437 3111 <sup>(1)</sup> Red IP65 1438 3111	200 mm 1401 1520 320 mm 1401 3532 <sup>(1)</sup>	-				3 P 2698 3120 <sup>(2)</sup> 4 P 2698 4120 <sup>(2)</sup>	
	4 P	2605 4181													3 P 2698 3120 <sup>(2)</sup> 4 P 2698 4120 <sup>(2)</sup>				

(1) Standard.  
(2) Top or bottom

# SIRCO

## Load break switches for power distribution

from 125 to 5000 A

### Accessories

#### Direct operation handle

##### For SIRCO

Rating (A) / Frame size	No. of poles	Handle type	Handle colour	Reference
125 ... 160 / B3	3/4 P	J0	Black	1102 <b>1111</b> <sup>(1)</sup>
125 ... 160 / B3 <sub>DS</sub>	6/8 P	J2	Black	1122 <b>1111</b> <sup>(1)</sup>
125 ... 160 / B3 <sub>DS</sub>	6/8 P	J2	Red	1123 <b>1111</b>
200 ... 630 / B4-B5	3/4 P	J1	Black	1112 <b>1111</b> <sup>(1)</sup>
200 ... 630 / B4-B5	3/4 P	J1	Red	1113 <b>1111</b>
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	6/8 P	J3	Black	1132 <b>1111</b> <sup>(1)</sup>
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	6/8 P	J3	Red	1133 <b>1111</b>
800 ... 1800 / B6...B7	3/4 P	J4	Blue	1142 <b>1111</b> <sup>(1)</sup>
800 ... 1800 / B6...B7	3/4 P	J4	Red	1143 <b>1111</b>
800 ... 1600 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	6/8 P	J4	Blue	1142 <b>1111</b> <sup>(1)</sup>
800 ... 1600 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	6/8 P	J4	Red	1143 <b>1111</b>
1800 ... 3200 / B8	3/4 P	S5	Black	2799 <b>7042</b> <sup>(1)</sup>
4000 ... 5000 / B9	3/4 P	V0	Black	2799 <b>7072</b> <sup>(1)</sup>

(1) Standard.

##### For SIRCO AC

Rating (A) / Frame size	No. of poles	Handle type	Handle colour	Reference
200 ... CD 630 / B4 ... B5	3/4 P	J1	Black	1112 <b>1111</b> <sup>(1)</sup>
200 ... CD 630 / B4 ... B5	3/4 P	J1	Red	1113 <b>1111</b>
630 ... 1600 / B6 ... B7	3/4 P	J4	Blue	1142 <b>1111</b> <sup>(1)</sup>
630 ... 1600 / B6 ... B7	3/4 P	J4	Red	1143 <b>1111</b>
2000 / B8	3/4 P	S5	Black	2799 <b>7042</b> <sup>(1)</sup>

(1) Standard.



#### External operation handle

##### Use

Door interlocked external operating handles include an escutcheon, are padlockable and must be used with an extension shaft.

##### Front operation for SIRCO and SIRCO AC

Rating (A) / Frame size		No. of poles	Handle type	Handle colour	External IP <sup>(1)</sup>	Reference
SIRCO	SIRCO AC					
125 ... 630 / B3 ... B5	200 ... CD 630 / B4 ... B5	3/4 P	S2	Black	IP55	1421 <b>2111</b> <sup>(2)</sup>
				Black	IP65	1423 <b>2111</b>
				Red	IP65	1424 <b>2111</b>
125 ... 160 / B3 <sub>DS</sub>	-	6/8 P	S2	Black	IP55	1421 <b>2111</b> <sup>(2)</sup>
				Black	IP65	1423 <b>2111</b>
				Red	IP65	1424 <b>2111</b>
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	-	6/8 P	S4	Black	IP65	1443 <b>3111</b>
				Red	IP65	1444 <b>3111</b>
800 ... 1600 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	-	6/8 P	V1	Black	IP65	2799 <b>7145</b> <sup>(2)</sup>
800 ... 1800 / B6-B7	630 ... 1600 / B6 ... B7	3/4 P	S4	Black	IP65	1443 <b>3111</b> <sup>(2)</sup>
				Red	IP65	1444 <b>3111</b>
2000 ... 3200 / B8	2000 / B8	3/4 P	V2	Black	IP65	2799 <b>7136</b> <sup>(2)</sup>
				Red	IP65	2799 <b>7134</b>
				Black	IP65	1453 <b>8111</b>
4000 ... 5000 / B9	-	3/4 P	V0	Black	IP65	2799 <b>7155</b> <sup>(2)</sup>

(1) IP: protection index according to IEC 60529. (2) Standard.

##### Right side operation for SIRCO

Rating (A)	No. of poles	Handle type	Handle colour	External IP <sup>(1)</sup>	Reference
160 ... 630 / B3 ... B5	3/4 P	S2	Black	IP55	1425 <b>2111</b> <sup>(2)</sup>
160 ... 630 / B3 ... B5	3/4 P	S2	Black	IP65	1427 <b>2111</b>
160 ... 630 / B3 ... B5	3/4 P	S2	Red	IP65	1428 <b>2111</b>
800 ... 1800 / B6 ... B7	3/4 P	S3	Black	IP65	1437 <b>3111</b> <sup>(2)</sup>
800 ... 1800 / B6 ... B7	3/4 P	S3	Red	IP65	1438 <b>3111</b>

(1) IP: protection index according to IEC 60529. (2) Standard.



## Accessories (continued)

### Shaft guide for external operation

For SIRCO and SIRCO AC 3/4-pole devices				
Rating (A) / Frame size		Dimension X (mm)	Length (mm)	Reference
SIRCO	SIRCO AC			
125 ... 160 / B3	-	125 ... 250	200	1400 1020
		125 ... 300	250	1400 1025
		125 ... 370	320	1400 1032
		125 ... 550	500	1400 1050
		125 ... 850	750	1400 1075
200 ... 250 / B4	200 ... 315 / B4	135 ... 265	200	1400 1020
		135 ... 315	250	1400 1025
		135 ... 385	320	1400 1032
		135 ... 565	500	1400 1050
		135 ... 880	750	1400 1075
315 ... 630 / B5	400 ... CD 630 / B5	165 ... 295	200	1400 1020
		165 ... 345	250	1400 1025
		165 ... 415	320	1400 1032
		165 ... 595	500	1400 1050
		165 ... 940	750	1400 1075
800 ... 1800 / B6...B7	630 ... 1600 / B6 ... B7	221 ... 343	200	1401 1520
		221 ... 463	320	1401 1532
		221 ... 543	400	1401 1540
2000 ... 3200 / B8	2000 / B8	415 ... 570	200	2799 3015
		415 ... 690	320	2799 3018
		415 ... 820	450	2799 3019
4000 ... 5000 / B9	4000 / B9	550 ... 680	200	2799 3015
		651 ... 921	320	2799 3018


#### Use

Shaft lengths:

- 200 mm
- 250 mm
- 300 mm
- 400 mm
- 500 mm
- 750 mm

#### Other lengths available:

- please contact us.

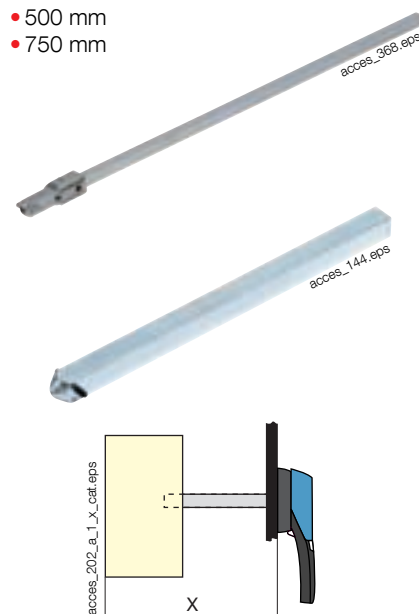

### Alternative colour S-type handle cover


#### Use

For single lever handle types S1, S2, S3 and double lever handle type S4.

#### Other colours available:

please contact us.

Handle colour	Order in multiples of	Handle type	Reference
Light grey	50	S2, S3	1401 0001
Dark grey	50	S2, S3	1401 0011
Light grey	50	S4	1401 0031



S type cover

### S-type handle adaptor

#### Use

Enables S-type handles to be fitted in place of existing older style Socomec handles. Adapter can be utilised as a spacer to increase the distance between the panel door and the handle lever.

Adds 12 mm to the depth of the handle.

Handle colour	Available for order in multiples of	External IP <sup>(1)</sup>	Reference
Black	1	IP65	1493 0000

(1) IP: Ingress Protection rating according to IEC 60529.



# SIRCO

## Load break switches for power distribution

from 125 to 5000 A

### Accessories (continued)

#### Shaft guide for external operation

##### Use

Use with S-type handles to guide the shaft extension into the external handle. This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm. Recommended for shaft lengths over 320 mm.

Description	Reference
Shaft guide	1429 0000



#### Auxiliary contact

##### Use

Pre-break and signalling of positions 0 and I:

- 1 to 2 NO/NC auxiliary contacts.
- 1 to 4 NO+NC auxiliary contacts.
- 1 to 2 low level NO/NC auxiliary contacts.

##### Characteristics

- NO/NC AC: IP2x from front.

##### Connection to the control circuit

- 6.35 mm fast-on terminal.

##### Electrical characteristics

- 30,000 operations.


NO/NC contact for 3/4-pole SIRCO and SIRCO AC		
Rating (A) / Frame size	Position AC	Reference
125 ... 3200 / B3 ... B8	1 <sup>st</sup>	2699 0031
125 ... 3200 / B3 ... B8	2 <sup>nd</sup>	2699 0032
4000 ... 5000 / B9	1 <sup>st</sup> /2 <sup>nd</sup>	included

NO/NC contact for 6/8-pole SIRCO		
Rating (A) / Frame size	Position AC	Reference
125 ... 1600 / B3DS ... B7DS	1 <sup>st</sup>	2699 0061
125 ... 1600 / B3DS ... B7DS	2 <sup>nd</sup>	2699 0062

NO+NC contact for 3/4-pole SIRCO and SIRCO AC		
Rating (A) / Frame size	Position AC	Reference
125 ... 3200 / B3 ... B8	1 <sup>st</sup>	2699 0141
125 ... 3200 / B3 ... B8	2 <sup>nd</sup> /3 <sup>rd</sup> /4 <sup>th</sup>	2699 0142

Low level NO/NC contact for 3/4-pole SIRCO and SIRCO AC		
Rating (A) / Frame size	Position AC	Reference
125 ... 3200 / B3 ... B8	1 <sup>st</sup>	2699 0301
125 ... 3200 / B3 ... B8	2 <sup>nd</sup>	2699 0302

Characteristics			Operating current I <sub>e</sub> (A)									
			230 VAC		400 VAC		24 VDC			48 VDC		
Rating (A) / Frame size	Contact type	Current current (A)	AC-12	AC-13/15	AC-12	AC-13/15	DC-12	DC-13	DC-14	DC-12	DC-13	DC-14
125 ... 3200 / B3 ... B8	NO/NC	16	16	4	12	3	2.5	2.5	1	2.5	1.2	0.2
125 ... 3200 / B3 ... B8	NO + NC	16	16	4	16	3	16	5	1	2.5	1.2	0.2

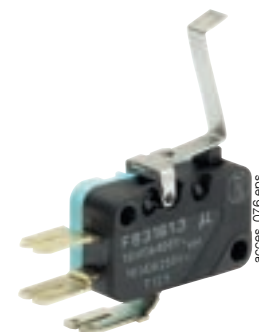

#### Inter-phase barriers

##### Use

Safety isolation between the terminals, essential for use at 690 VAC or in a polluted or dusty atmosphere.

For 3/4-pole SIRCO and SIRCO AC			
Rating (A) / Frame size		No. of poles	Reference
SIRCO	SIRCO AC		
125 ... 160 / B3		3 P	2998 0033
125 ... 160 / B3		4 P	2998 0034
200 ... 250 / B4	200 ... 315 / B4	3 P	2998 0023
200 ... 250 / B4	200 ... 315 / B4	4 P	2998 0024
315 ... 630 / B5	315 ... CD 630 / B5	3 P	2998 0013
315 ... 630 / B5	315 ... CD 630 / B5	4 P	2998 0014
800 ... 5000 / B6 ... B9	630 ... 2000 / B6 ... B8	3 P	included
800 ... 5000 / B6 ... B9	630 ... 2000 / B6 ... B8	4 P	included



## Accessories (continued)

### Terminal shrouds

#### Use

Top or bottom protection against direct contact with terminals or connection parts.

#### Advantage

Perforations allow remote thermographic inspection without the need to remove the shrouds. The terminal shrouds also provide phase separation for SIRCO and SIRCO AC 125 to 630 A.



access\_077.eps

#### For 3/4-pole SIRCO and SIRCO AC

Rating (A) / Frame size		No. of poles	Position	Reference
SIRCO	SIRCO AC			
125 ... 160 / B3		3 P	top or bottom	2694 3014 <sup>(1)</sup>
125 ... 160 / B3		4 P	top or bottom	2694 4014 <sup>(2)</sup>
200 ... 250 / B4	200 ... 315 / B4	3 P	top or bottom	2694 3021 <sup>(1)</sup>
200 ... 250 / B4	200 ... 315 / B4	4 P	top or bottom	2694 4021 <sup>(2)</sup>
315 ... 630 / B5	400 ... CD 630 / B5	3 P	top or bottom	2694 3051 <sup>(1)</sup>
315 ... 630 / B5	400 ... CD 630 / B5	4 P	top or bottom	2694 4051 <sup>(2)</sup>

(1) Reference includes 3 parts for top or bottom protection.

(2) Reference includes 4 parts for top or bottom protection.

#### For 6/8-pole SIRCO

Rating (A) / Frame size		No. of poles	Position	Reference
125 ... 160 / B3 <sub>DS</sub>				
125 ... 160 / B3 <sub>DS</sub>		8 P	Top or bottom	2694 4014 <sup>(2)(3)</sup>
250 / B4 <sub>DS</sub>		6 P	Top or bottom	2694 3021 <sup>(1)(3)</sup>
250 / B4 <sub>DS</sub>		8 P	Top or bottom	2694 4021 <sup>(2)(3)</sup>
400 ... 630 / B5 <sub>DS</sub>		6 P	Top or bottom	2694 3051 <sup>(1)(3)</sup>
400 ... 630 / B5 <sub>DS</sub>		8 P	Top or bottom	2694 4051 <sup>(2)(3)</sup>

(1) Reference includes 3 parts for top or bottom protection on the front or rear of the device.

(2) Reference includes 4 parts for top or bottom protection on the front or rear of the device.

(3) Select 2 sets for front or rear.

### Distribution block

#### Use

Easy connection of multiple cables, downstream of the SIRCO.

#### For 3/4-pole SIRCO


Rating (A) / Frame size	No. of poles	No. of feeders per section (mm <sup>2</sup> )	I <sub>cc</sub> (kA rms) <sup>(1)</sup>	Reference
160 / B3	3 P	1x95 + 8x25	10	5411 3016
160 / B3	4 P	1x95 + 8x25	10	5411 4016
250 / B4	3 P	1x150 + 8x50	15	5411 3025
250 / B4	4 P	1x150 + 8x50	15	5411 4025
400 / B5	3 P	1x240 + 8x95	21	5411 3040
400 / B5	4 P	1x240 + 8x95	21	5411 4040
630 / B5	3 P	1x300 + 8x150	21	5411 3063
630 / B5	4 P	1x300 + 8x150	21	5411 4063

#### Dimensions

Rating (A) / Frame size	No. of poles	A	B	T	H	K	P	R	T	Y
160 / B3	3 P	154	286	73	46.5	261.5	36	20	4	54
160 / B3	4 P	190	286	73	46.5	261.5	36	20	4	54
250 / B4	3 P	210	307	83	57.5	279	50	25	4	56
250 / B4	4 P	260	307	83	57.5	279	50	25	4	56
400 / B5	3 P	281	375	116	82.5	340	65	32	5	82
400 / B5	4 P	346	375	116	82.5	340	65	32	5	82
630 / B5	3 P	271	438	117	90.5	410.5	65	40	6	83
630 / B5	4 P	346	438	117	90.5	410.5	65	40	6	83



repar\_020.psd

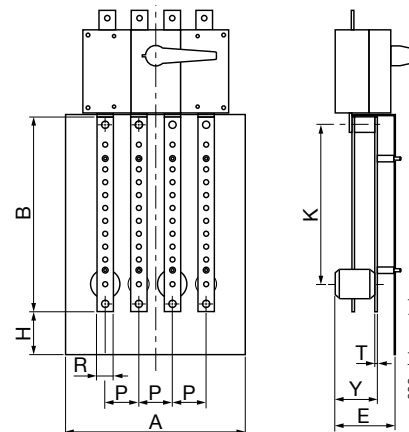

repar\_003.d\_1\_x\_cat.ai

# SIRCO

## Load break switches for power distribution

from 125 to 5000 A

### Accessories (continued)

#### Terminal screens

##### Use

Top or bottom protection against direct contact with terminals or connection parts.

##### For 3/4-pole SIRCO and SIRCO AC

Rating (A) / Frame size		No. of poles	Position	Reference
SIRCO	SIRCO AC			
125 ... 160 / B3	-	3 P	top or bottom	2698 3012
125 ... 160 / B3	-	4 P	top or bottom	2698 4012
200 ... 250 / B4	200 ... 315 / B4	3 P	top or bottom	2698 3020
200 ... 250 / B4	200 ... 315 / B4	4 P	top or bottom	2698 4020
315 ... 630 / B5	400 ... CD 630 / B5	3 P	top or bottom	2698 3050
315 ... 630 / B5	400 ... CD 630 / B5	4 P	top or bottom	2698 4050
800 ... CD 1250 / B6	630 ... CD 1250 / B6	3 P	top or bottom	2698 3080
800 ... CD 1250 / B6	630 ... CD 1250 / B6	4 P	top or bottom	2698 4080
1250 ... 1800 / B7	1250 ... 1600 / B7	3 P	top or bottom	2698 3120
1250 ... 1800 / B7	1250 ... 1600 / B7	4 P	top or bottom	2698 4120
2000 ... 3200 / B8	2000 / B8	3 P	top or bottom	2698 3200
2000 ... 3200 / B8	2000 / B8	4 P	top or bottom	2698 4200
4000 ... 5000 / B9	-	3/4 P	top or bottom	1509 4200



access\_0719.eps

##### For 6/8-pole SIRCO

Rating (A) / Frame size	No. of poles	Position	Reference
125 ... 160 / B3 <sub>DS</sub>	6 P	Top or bottom	1509 3012
125 ... 160 / B3 <sub>DS</sub>	8 P	Top or bottom	1509 4012
250 / B4 <sub>DS</sub>	6 P	Top or bottom	1509 3025
250 / B4 <sub>DS</sub>	8 P	Top or bottom	1509 4025
400 ... 630 / B5 <sub>DS</sub>	6 P	Top or bottom	1509 3063
400 ... 630 / B5 <sub>DS</sub>	8 P	Top or bottom	1509 4063
800 ... 1250 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	6 P	Top or bottom	1509 3080
800 ... 1250 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	8 P	Top or bottom	1509 4080
1600 / B7 <sub>DS</sub>	6 P	Top or bottom	1509 3160
1600 / B7 <sub>DS</sub>	8 P	Top or bottom	1509 4160

#### Cage terminals

##### Use

They enable the connection of flexible copper and aluminium conductors to SIRCO power terminals.

##### Material


Tin-plated aluminium

##### Dimensions

Rating (A) / Frame size	A	A1	C	R	ØX	X1	Z
125 ... 160 / B3	47.5	22.5	25	20	8.5	M12	10
200 ... 250 / B4	62	31.5	31.5	25	10.5	M16	14
315 ... 400 / B5	71.5	32	38	32	10.5	M20	15
500 ... 630 / B5	76.5	37	38	40	12.5	M20	15

##### References

Rating (A) / Frame size	Clamping capacity (mm²)	No. of poles	Tightening torque (Nm)	Flexible busbar width (mm)	Reference
125 ... 160 / B3	16 ... 95	3 P	14	13	5400 3016
125 ... 160 / B3	16 ... 95	4 P	14	13	5400 4016
200 ... 250 / B4	16 ... 185	3 P	25	18	5400 3025
200 ... 250 / B4	16 ... 185	4 P	25	18	5400 4025
315 ... 400 / B5	50 ... 240	3 P	45	20	5400 3040
315 ... 400 / B5	50 ... 240	4 P	45	20	5400 4040
500 ... 630 / B5	70 ... 300	3 P	45	24	5400 3063
500 ... 630 / B5	70 ... 300	4 P	45	24	5400 4063

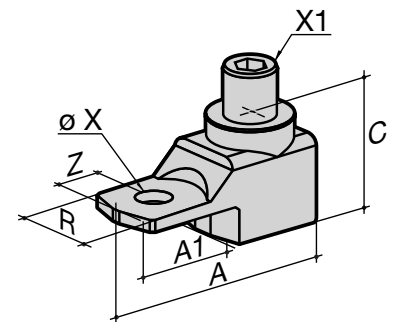

born\_0119\_a\_1\_x\_cat.eps

## Accessories (continued)

### Copper bar connection kits

#### Use

To enable connection between the two power terminals of the same pole for 2000 to 3200 A ratings (Fig. 1 and Fig. 2). For 3200 A rating, the connection pieces (part A) are delivered bridged as standard. Bolt sets must be ordered separately. For more details on these specific accessories, please consult the user guide that can be downloaded at [www.socomec.com](http://www.socomec.com).

Top or bottom connection - Fig. 1

Rating (A) / Frame size	Part	Quantity to order per pole <sup>(1)</sup>	Reference
2000 ... 2500 / B8	Connection - part A	1	2619 1200
2000 ... 2500 / B8	Bolt set - part B	1	2699 1200
3200 / B8	Connection - part A		included
3200 / B8	Bolt set - part B	1	2699 1200
4000 ... 5000 / B9	Standard connection		

(1) Example for 3-pole device equipped upstream only: order 3 times the indicated quantities.

Fig. 1


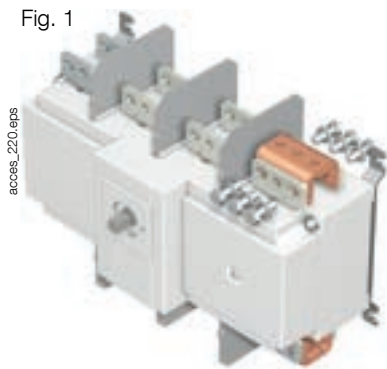


Fig. 1

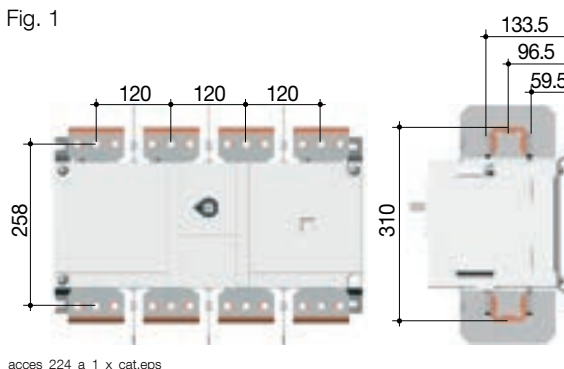

access\_224\_a\_1\_x\_cat.eps

Top or bottom edgewise connection - Fig. 2

Rating (A) / Frame size	Part	Quantity to order per pole <sup>(1)</sup>	Reference
2000 ... 2500 / B8	Connection - part A	1	2619 1200
2000 ... 2500 / B8	T piece - part C	1	2629 1200 <sup>(2)</sup>
2000 ... 2500 / B8	Bracket - part D	1	2639 1200 <sup>(2)</sup>
3200 / B8	Connection - part A		included
3200 / B8	T piece - part C	1	2629 1200
3200 / B8	Bracket - part D	1	2639 1200
4000 ... 5000 / B9	Standard connection		

(1) Example for 3-pole device equipped upstream only: order 3 times the indicated quantities.  
(2) Bolt set is provided with the accessories.

Fig. 2


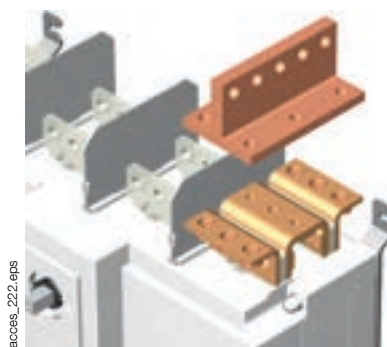


Fig. 2

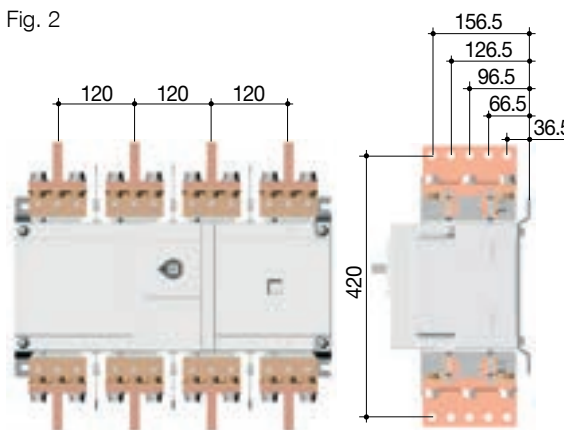

access\_225\_a\_1\_x\_cat.eps

# SIRCO

## Load break switches for power distribution

from 125 to 5000 A

### Accessories (continued)

#### Operation lock-out device

##### Use

Locking in position 0 of the front or side operating handle:

- using a padlock (not supplied) and standard padlocking function of the handle. From 125 to 1800 A, padlocking the external front operating handle provides door interlocking
- using a lock (not supplied): see diagrams opposite,
- using an undervoltage coil: the SIRCO can only be closed if the coil is energised.

For 6 or 8-pole, please contact us.

For SIRCO				
Locking using RONIS EL11AP lock (not included)				
Rating (A) / Frame size	No. of poles	Operation	Figure	Reference
125 ... 630 / B3 ... B5	3/4 P	Direct front	1	2699 6008 <sup>(1)</sup>
125 ... 1800 / B3 ... B7	3/4 P	External front	3	1499 7701
800 ... 3200 / B6 ... B8	3/4 P	Direct front	2	2699 6027
1250 ... 5000 / B7 ... B9	3/4 P	External front	4	2799 7002
RONIS EL 11AP Lock				4409 8511

(1) Front operation handle included.

For SIRCO AC				
Locking using RONIS EL11AP lock (not included)				
Rating (A) / Frame size	No. of poles	Operation	Figure	Reference
200 ... CD 630 / B4 ... B5	3/4 P	Direct front	1	2699 6008 <sup>(1)</sup>
630 ... 1600 / B6 ... B7	3/4 P	Direct front	2	2699 6027
RONIS EL 11AP Lock				4409 8511


(1) The locking system is mounted on the device itself.

For SIRCO				
Locking using 230 VAC undervoltage coil (please contact us for other voltages)				
Rating (A) / Frame size	No. of poles	Operation	Reference	
125 ... 630 / B3 ... B5	3/4 P	External front	2699 9063 <sup>(1)</sup>	
800 ... 3200 / B6 ... B8	3/4 P	Direct front	2699 9315 <sup>(1)</sup>	

(1) The locking system is mounted on the device itself.


Locking using CASTELL lock (not supplied)						
Rating (A) / Frame size	No. of poles	Handle type	Type of lock	Operation	Figure	Reference
125 ... 160 / B3	6/8 P	S2	K	External front	2	4109 8507
125 ... 1800 / B3 ... B8	3/4 P	S2, S4	FS	External front	3	1499 7703
125 ... 1800 / B3 ... B8	3/4 P	S2, S4	K	External front	3	1499 7702
250 ... 630 / B4 ... B5	6/8 P	S4	K	External front	2	2999 8707
800 ... 1600 / B6 ... B7	6/8 P	S5	K	External front	2	2799 7003
1250 ... 4000 / B7 ... B9	3/4 P	S5, S0	K	External front	2	2799 7003

Fig. 1




aces\_001\_a\_1\_x\_cat.eps

Fig. 2




aces\_005\_a\_1\_x\_cat.eps

Fig. 3



aces\_158\_a\_1\_x\_cat.eps

Fig. 4



aces\_004\_c\_1\_x\_cat.eps

#### Other specific accessories



bd\_03\_01\_01.ai

- Mechanical coupling device for combining switches with "n" poles of the same or different ratings
- Mechanical interlocking device

## SIRCO characteristics according to IEC 60947-3

### 125 to 800 A

Thermal current $I_{th}$ at 40 °C	125 A	160 A	200 A	250 A	315 A	400 A	500 A	630 A	800 A
<b>Frame size</b>	<b>B3</b>	<b>B3</b>	<b>B4</b>	<b>B4</b>	<b>B5</b>	<b>B5</b>	<b>B5</b>	<b>B5</b>	<b>B6</b>
Rated insulation voltage $U_i$ (V)	800	800	800	800	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	8	8	8	8	12	12	12	12	12
<b>Rated operational currents <math>I_o</math> (A)</b>									
Rated voltage	Utilisation category	A / B <sup>(1)</sup>	A / B <sup>(1)</sup>	A / B <sup>(1)</sup>	A / B <sup>(1)</sup>	A / B <sup>(1)</sup>	A / B <sup>(1)</sup>	A / B <sup>(1)</sup>	A / B <sup>(1)</sup>
415 VAC	AC-20 A / AC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
415 VAC	AC-21 A / AC-21 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
415 VAC	AC-22 A / AC-22 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
415 VAC	AC-23 A / AC-23 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
220 VDC	DC-20 A / DC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
220 VDC	DC-21 A / DC-21 B	125 / 125	160 / 160	160 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
220 VDC	DC-22 A / DC-22 B	125 / 125	160 / 160	160 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
220 VDC	DC-23 A / DC-23 B	125 / 125	125 / 125	160 / 160	200 / 200	315 / 315	400 / 400	500 / 500	630 / 630
440 VDC	DC-20 A / DC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
440 VDC	DC-21 A / DC-21 B	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	160 <sup>(2)</sup> / 160 <sup>(2)</sup>	160 <sup>(2)</sup> / 200 <sup>(2)</sup>	200 <sup>(2)</sup> / 200 <sup>(2)</sup>	315 <sup>(2)</sup> / 315 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	500 <sup>(2)</sup> / 500 <sup>(2)</sup>
440 VDC	DC-22 A / DC-22 B	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	160 <sup>(2)</sup> / 160 <sup>(2)</sup>	200 <sup>(2)</sup> / 200 <sup>(2)</sup>	315 <sup>(2)</sup> / 315 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	500 <sup>(2)</sup> / 500 <sup>(2)</sup>
440 VDC	DC-23 A / DC-23 B	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	160 <sup>(3)</sup> / 160 <sup>(3)</sup>	200 <sup>(3)</sup> / 200 <sup>(3)</sup>	315 <sup>(3)</sup> / 315 <sup>(3)</sup>	400 <sup>(3)</sup> / 400 <sup>(3)</sup>	400 <sup>(3)</sup> / 400 <sup>(3)</sup>	500 / 500
500 VDC	DC-20 A / DC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630
500 VDC	DC-21 A / DC-21 B	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	160 <sup>(2)</sup> / 200 <sup>(2)</sup>	200 <sup>(2)</sup> / 200 <sup>(2)</sup>	315 <sup>(2)</sup> / 315 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	500 <sup>(2)</sup> / 500 <sup>(2)</sup>
500 VDC	DC-22 A / DC-22 B	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	160 <sup>(3)</sup> / 160 <sup>(3)</sup>	200 <sup>(3)</sup> / 200 <sup>(3)</sup>	315 <sup>(3)</sup> / 315 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	500 <sup>(3)</sup> / 500 <sup>(3)</sup>
500 VDC	DC-23 A / DC-23 B	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	160 <sup>(3)</sup> / 160 <sup>(3)</sup>	200 <sup>(3)</sup> / 200 <sup>(3)</sup>	315 <sup>(3)</sup> / 315 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	500 <sup>(3)</sup> / 500 <sup>(3)</sup>
<b>Operational power in AC-23 (kW) <sup>(1)(4)</sup></b>									
At 415 VAC without pre-break AC <sup>(1)</sup>	63 / 63	80 / 80	100 / 100	132 / 132	160 / 160	220 / 220	280 / 280	280 / 280	450 / 450
<b>Reactive power (kvar)</b>									
At 400 VAC (kvar) <sup>(4)</sup>	55	75	90	115	145	185	230	290	365
<b>gG DIN fuse-protected short-circuit withstand (prospective kA rms)<sup>(6)</sup></b>									
Prospective short-circuit current (kA rms)	100	100	80	50	100	100	100	70	50
Associated fuse rating (A)	125	160	200	250	315	400	500	630	800
<b>Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s</b>									
Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	15	15	17	17	25	25	25	25	50
<b>Short-circuit operation without protection</b>									
Rated short-time withstand current $I_{cw}$ 1s (kA rms)	7	7	9	9	13	13	13	13	26
Rated peak withstand current in $I_{sc}$ (kA peak) <sup>(5)(6)</sup>	20	20	30	30	45	45	45	45	55
<b>Connection</b>									
Minimum Cu cable cross-section	35	50	70	95	150	185	240	2 x 150	2 x 185
Minimum Cu busbar cross-section (mm <sup>2</sup> )								2 x 30 x 5	2 x 40 x 5
Maximum copper cable cross-section (mm <sup>2</sup> )	50	95	95	150	240	240	240	2 x 300	2 x 300
Maximum width of copper bars (mm)	25	25	32	32	40	40	40	50	63
Tightening torque min. - max. (Nm)	9 / -	9 / -	20 / -	20 / -	20 / -	20 / -	20 / -	40 / 45	40 / 45
<b>Power dissipation</b>									
Power dissipation W/Pole	1,8	3	4	5,8	7,5	10,8	16	30,9	39,7
<b>Mechanical characteristics</b>									
Durability (number of operating cycles)	10000	10000	10000	10000	10000	10000	10000	10000	3000
Operating effort (Nm)	6.5	6.5	10	10	14.5	14.5	14.5	14.5	37
Weight of a 3-pole device (kg)	1	1.5	2	2	3.5	3.5	3.5	3.5	8
Weight of a 4-pole device (kg)	1.5	1.5	2	2	4	4	4.5	4.5	10

(1) Category with index A = frequent operation / Category with index B = infrequent operation.

(2) 3-pole device with 2 poles in series for the "+" and 1 pole for the "-".

(3) 4-pole device with 2 poles in series per polarity

(4) The power value is given for information only; current values vary from one manufacturer to another.

(5) For a rated operational voltage  $U_e = 415$  VAC.

(6) Coordination tables with circuit breakers: please contact us.

### SIRCO characteristics according to IEC 60947-3

#### 1000 to 5000 A

Thermal current $I_{th}$ at 40 °C	1000 A	CD 1250 A	1250 A	1600 A	1800 A	2000 A	2500 A	3200 A	4000 A	5000 A
<b>Frame size</b>	<b>B6</b>	<b>B6</b>	<b>B7</b>	<b>B7</b>	<b>B7</b>	<b>B8</b>	<b>B8</b>	<b>B8</b>	<b>B9</b>	<b>B9</b>
Rated insulation voltage $U_i$ (V)	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	12	12	12	12	12	12	12	12	12	12
<b>Rated operational currents <math>I_o</math> (A)</b>										
Rated voltage	Utilisation category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>
415 VAC	AC-20 A / AC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000
415 VAC	AC-21 A / AC-21 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000
415 VAC	AC-22 A / AC-22 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	2500 / 3200	2500 / 3200
415 VAC	AC-23 A / AC-23 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1600 / 1600	1600 / 1600	1600 / 1600	1800 / 2000
220 VDC	DC-20 A / DC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000
220 VDC	DC-21 A / DC-21 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1600	1250 / 1600	2000 / 2000	2000 / 2500	2000 / 2500	2500 / 3200
220 VDC	DC-22 A / DC-22 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1600	1250 / 1600	1250 / 1600	1800 / 2000
220 VDC	DC-23 A / DC-23 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1600
440 VDC	DC-20 A / DC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000
440 VDC	DC-21 A / DC-21 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	2000 <sup>(2)</sup> / 2000 <sup>(2)</sup>	2000 <sup>(2)</sup> / 2500 <sup>(2)</sup>	2500 <sup>(2)</sup> / 3200 <sup>(2)</sup>	3200 <sup>(2)</sup> / 4000 <sup>(2)</sup>
440 VDC	DC-22 A / DC-22 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1600 <sup>(2)</sup> / 1800 <sup>(2)</sup>
440 VDC	DC-23 A / DC-23 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>
500 VDC	DC-20 A / DC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3250 / 3250	4000 / 4000
500 VDC	DC-21 A / DC-21 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1600 <sup>(2)</sup> / 1800 <sup>(2)</sup>
500 VDC	DC-22 A / DC-22 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>
500 VDC	DC-23 A / DC-23 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>
<b>Operational power in AC-23 (kW) <sup>(1)(3)</sup></b>										
At 415 VAC without pre-break AC <sup>(1)</sup>	560 / 560	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710
<b>Reactive power (kvar)</b>										
At 400 VAC (kvar) <sup>(3)</sup>	460									
<b>gG DIN fuse-protected short-circuit withstand (prospective kA rms)<sup>(4)</sup></b>										
Prospective short-circuit current (kA rms)	100	100	100	100	100	100	100	100		
Associated fuse rating (A)	1000	1250	1250	2 x 800	2 x 800	2 x 1000	2 x 1250			
<b>Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s</b>										
Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	65	65	100	100	100	100	100	100	100	
<b>Short-circuit operation without protection</b>										
Rated short-time withstand current $I_{cw}$ 1s (kA rms)	35	35	50	50	50	50	50	50	75	75
Rated peak withstand current in $I_{cc}$ (kA peak) <sup>(4)(5)</sup>	80	80	110	110	110	110	110	110	120	165
<b>Connection</b>										
Minimum Cu cable cross-section	2 x 240									
Minimum Cu busbar cross-section (mm <sup>2</sup> )	2 x 50 x 5	2 x 60 x 5	2 x 60 x 5	2 x 80 x 5	3 x 100 x 5	3 x 100 x 5	4 x 100 x 5	4 x 100 x 5	2 x 200 x 10	2 x 200 x 10
Maximum copper cable cross-section (mm <sup>2</sup> )	4 x 185	4 x 185	4 x 185	6 x 185	6 x 185					
Maximum width of copper bars (mm)	63	63	100	100	100	100	100	100		
Tightening torque min. - max. (Nm)	40/45	40/45	40/45	40/45	40/45	40/45	40/-	40/-	40/-	40/-
<b>Power dissipation</b>										
Power dissipation W/Pole	44,7	69,8	85	122	161	140	205	340	420	480
<b>Mechanical characteristics</b>										
Durability (number of operating cycles)	3000	3000	4000	4000	4000	3000	3000	3000	2000	2000
Operating effort (Nm)	37	37	56	56	56	75	75	75	105	105
Weight of a 3-pole device (kg)	8	8	12	12	12	22	22	22	45	45
Weight of a 4-pole device (kg)	10	10	15	15	15	25	25	25	50	50

(1) Category with index A = frequent operation / Category with index B = infrequent operation.

(2) 4-pole device with 2 poles in series per polarity

(3) The power value is given for information only; current values vary from one manufacturer to another.

(4) For a rated operational voltage  $U_e = 415$  VAC.

(5) Coordination tables with circuit breaker; please contact us.

## SIRCO AC characteristics according to IEC 60947-3

### 200 to 630 A

Thermal current $I_{th}$ at 40 °C	200 A	250 A	315 A	400 A	500 A	CD 630 A	630 A
Rated insulation voltage $U_i$ (V)	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	12	12	12	12	12	12	12
Rated operational currents $I_c$ (A)							
Rated voltage	Utilisation category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>
500 VAC	AC-20 A / AC-20 B	200/200	250/250	315/315	400/400	500/500	630/630
500 VAC	AC-21 A / AC-21 B	200/200	250/250	315/315	400/400	500/500	630/630
500 VAC	AC-22 A / AC-22 B	200/200	250/250	315/315	400/400	500/500	630/630
500 VAC	AC-23 A / AC-23 B	200/200	250/250	315/315	400/400	500/500	630/630
690 VAC	AC-20 A / AC-20 B	200/200	250/250	315/315	400/400	500/500	630/630
690 VAC	AC-21 A / AC-21 B	200/200	250/250	315/315	400 <sup>(2)</sup> /400 <sup>(2)</sup>	500 <sup>(2)</sup> /500 <sup>(2)</sup>	630 <sup>(2)</sup> /630 <sup>(2)</sup>
690 VAC	AC-22 A / AC-22 B	200/200	250/250	315/315	400 <sup>(2)</sup> /400 <sup>(2)</sup>	500 <sup>(2)</sup> /500 <sup>(2)</sup>	630 <sup>(2)</sup> /630 <sup>(2)</sup>
690 VAC	AC-23 A / AC-23 B	200/200	250/250	315/315	400 <sup>(2)</sup> /400 <sup>(2)</sup>	500 <sup>(2)</sup> /500 <sup>(2)</sup>	630 <sup>(2)</sup> /630 <sup>(2)</sup>
Operational power in AC-23 (kW) <sup>(3)</sup>							
At 690 VAC without pre-break AC		160	220	250	400	500	630
Reactive power (kvar)							
At 690 VAC (kvar)		160	190	250	325	400	450
Fuse-protected short-circuit withstand (prospective kA rms) at 690 VAC <sup>(4)</sup>							
Prospective short-circuit current (kA rms)		50	50	50	50	50	50
Associated fuse rating (A)		200	250	315	400	500	630
Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s at 690 VAC							
Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)		15	15	15	15	15	28
Short-circuit operation without protection							
Rated short-time withstand current: 1 s. $I_{cw}$ (kA rms)		8	8	8	11	11	20
Rated short-circuit breaking capacity without fuses $I_{cm}$ (kA presumed peak)		22	22	22	22	22	40
Connection							
Minimum Cu cable cross-section		70	70	70	185	240	2 x 150
Minimum Cu busbar cross-section (mm <sup>2</sup> )							2 x 30 x 5
Maximum copper cable cross-section (mm <sup>2</sup> )		95	95	95	240	240	2 x 300
Maximum width of copper bars (mm)		32	32	32	40	40	63
Tightening torque min. - max. (Nm)		20/-	20/-	20/-	20/-	20/-	20/-
Power dissipation							
Power dissipation W/Pole		4	6	9,6	12,8	20	24,8
Mechanical characteristics							
Durability (number of operating cycles)		10000	10000	10000	5000	5000	5000
Operating effort (Nm)		10	10	10	14.5	14.5	14.5
Weight of a 3-pole device (kg)		2	2	2	3.5	3.5	3.5
Weight of a 4-pole device (kg)		2	2	2	4	4	4

(1) Category with index A = frequent operation / Category with index B = infrequent operation.

(2) With terminal shrouds or inter-phase barrier.

(3) The power value is given for information only; current values vary from one manufacturer to another.

(4) For a rated operational voltage  $U_e = 690$  VAC.

### SIRCO AC characteristics according to IEC 60947-3

#### 800 to 4000 A

Thermal current $I_{th}$ at 40 °C	800 A	1000A	CD 1250 A	1250 A	1600 A	2000 A
Rated insulation voltage $U_i$ (V)	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	12	12	12	12	12	12
Rated operational currents $I_c$ (A)						
Rated voltage	Utilisation category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>
500 VAC	AC-20 A / AC-20 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
500 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
500 VAC	AC-22 A / AC-22 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
500 VAC	AC-23 A / AC-23 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
690 VAC	AC-20 A / AC-20 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
690 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
690 VAC	AC-22 A / AC-22 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
690 VAC	AC-23 A / AC-23 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600
Operational power in AC-23 (kW) <sup>(3)</sup>						
At 690 VAC without pre-break AC	900	900	-	-	-	-
Reactive power (kvar)						
At 690 VAC (kvar)	550	750	950	950	-	-
Fuse-protected short-circuit withstand (prospective kA rms) at 690 VAC <sup>(4)</sup>						
Prospective short-circuit current (kA rms)	50	50	50	50	50	-
Associated fuse rating (A)	800	800	2 x 500	1250	2 x 800	-
Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s at 690 VAC						
Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	28	55	55	53	53	53
Short-circuit operation without protection at 690 VAC						
Rated short-time withstand current: 1 s. $I_{cw}$ (kA rms)	20	30	30	35	35	35
Rated short-circuit breaking capacity without fuses $I_{cm}$ (kA presumed peak)	40	80	80	75	75	75
Connection						
Minimum Cu cable cross-section	2 x 185	2 x 240				
Minimum Cu busbar cross-section (mm <sup>2</sup> )	2 x 40 x 5	2 x 50 x 5	2 x 60 x 5	2 x 60 x 5	2 x 80 x 5	3 x 100 x 5
Maximum copper cable cross-section (mm <sup>2</sup> )	2 x 300	4 x 185	4 x 185	4 x 185	6 x 185	
Maximum width of copper bars (mm)	63	63	63	100	100	100
Tightening torque min. - max. (Nm)	40/45	40/45	40/45	40	40	40
Power dissipation						
Power dissipation W/Pole	40	52,2	80	58	95	-
Mechanical characteristics						
Durability (number of operating cycles)	4000	4000	3000	4000	4000	3000
Operating effort (Nm)	48	48	48	55	55	75
Weight of a 3-pole device (kg)	8	8	8	12	12	22
Weight of a 4-pole device (kg)	10	10	10	15	15	25

(1) Category with index A = frequent operation / Category with index B = infrequent operation.

(2) With terminal shrouds or inter-phase barrier.

(3) The power value is given for information only; current values vary from one manufacturer to another.




(4) For a rated operational voltage  $U_e = 690$  VAC.

## Dimensions - Front operation

### SIRCO 125 to 630 A and SIRCO AC 200 to CD 630 A - B3 to B5

Direct front operation

External front operation

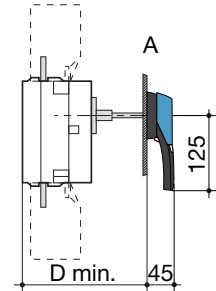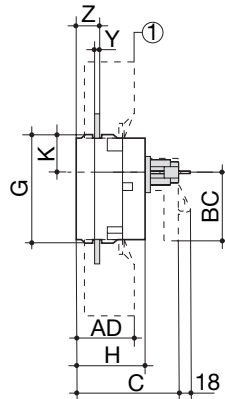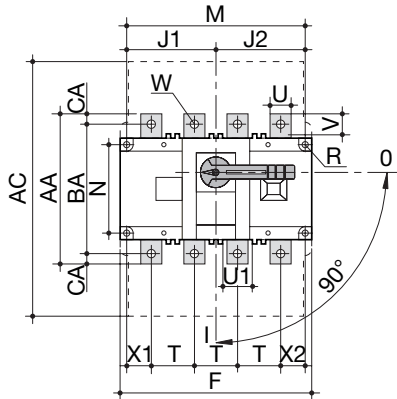

1. Terminal shroud

E. S2 type handle






Rating (A) / Frame size		Overall dimensions		Terminal shrouds		Switch body										Switch mounting				Connection												
SIRCO	SIRCO AC	C	D min	AC	AD	F 3p.	F 4p.	G	H	J1 3p.	J1 4p.	J2	K	BC	M 3p.	M 4p.	N	R	T	U	U1	V	W	X1 3p.	X1 4p.	X2	Y	Z	AA	BA	CA	
125...160/ B3		115	125	235	50	140	170	93	65	45	75	75	31.5	80	120	150	65	5.5	36	20	20.5	25	9	28	22	20	3.5	20.5	135	115	10	
200...250/ B4	200...250/ B4			280	60	180	230	108	75	55	105	105	34	115	160	210	80	5.5	50		25	25.5	21.5	11	33	33	27	3.5	22.5	160	130	15
	315 / B4																															
315...400/ B5	400...500/ B5	160	165																				11									
500 / B5	-			401	89	230	290	170	110	75	135	135	55	115	210	270	140	7	65		32	45.5	29							235	205	15
630 / B5	CD 630 / B5																					45	41.5	13							260	220

sirco\_198\_L1\_X\_cat.eps

### SIRCO 800 to 1800 A and SIRCO AC 630 to 1600 A - B6 to B7

Direct front operation

External front operation

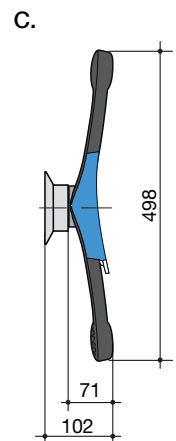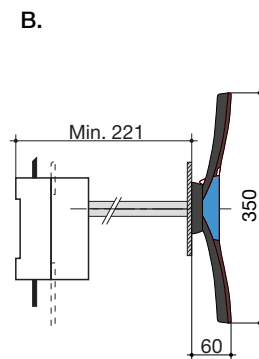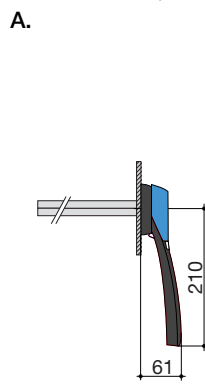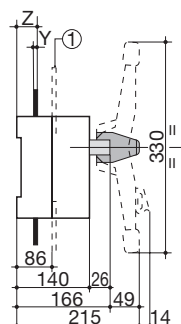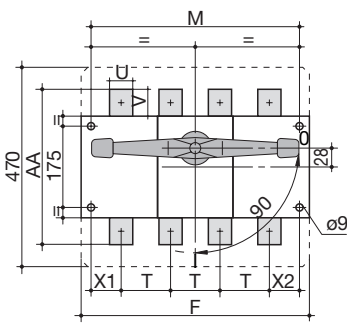

1. Terminal shroud

A. Single lever S3 type handle  
B. Double lever S4 type handle  
C. Double lever S5 type handle

Rating (A) / Frame size		Switch body		Switch mounting		Connection									
SIRCO	SIRCO AC	F 3p.	F 4p.	M 3p.	M 4p.	T	U	V	Y	X1	X2	Z	AA		
800 ... 1000 / B6	630 ... 1000 / B6	280	360	255	335	80	50	60.5	7	47.5	47.5	46.5	321		
CD 1250 / B6	CD 1250 / B6						60	65						330	
1250 ... 1800 / B7	1250 ... 1600 / B7	372	492	347	467	120	90	44	8	53.5	53.5	47.5	288		

sirco\_443\_a\_1\_X\_cat.eps



# SIRCO

Load break switches for power distribution  
from 125 to 5000 A


## Dimensions - Front operation

### SIRCO 2000 to 3200 A and SIRCO AC 2000 A - B8

Direct front operation

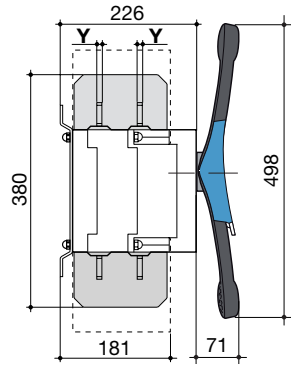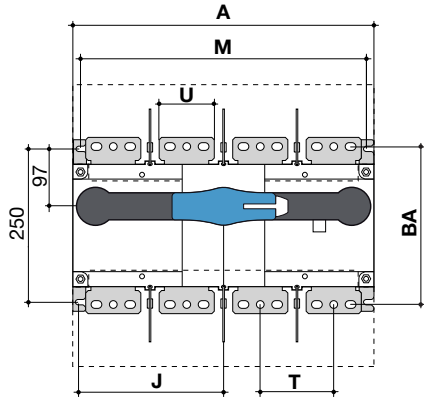

External front operation


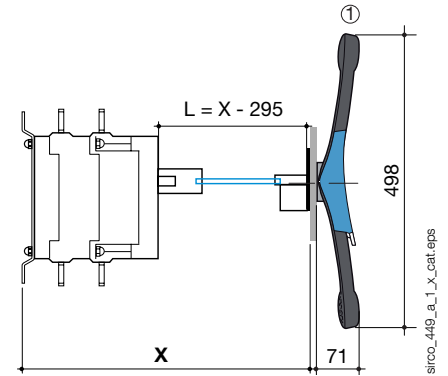


1. Double lever S5 type handle


Rating (A) / Frame size		Overall dimensions		Switch body		Switch mounting		Connection			
SIRCO	SIRCO AC	A 3p.	A 4p.	J 3p.	J 4p.	M 3p.	M 4p.	T	U	Y	BA
2000 ... 3200 / B8	2000 / B8	372	492	173.5	233.5	347	367	120	90	8	258

### SIRCO 4000 to 5000 A - B9

Direct front operation

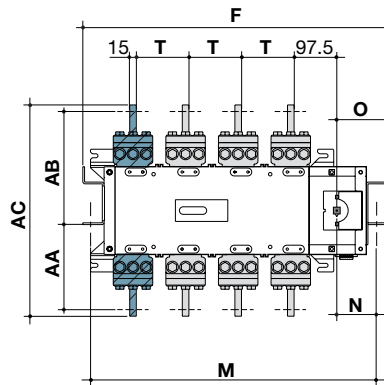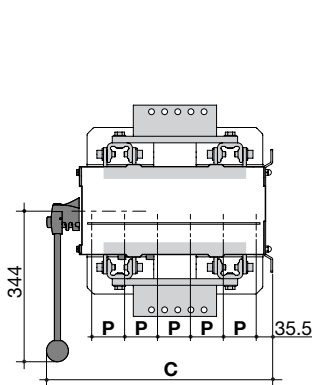

External front operation

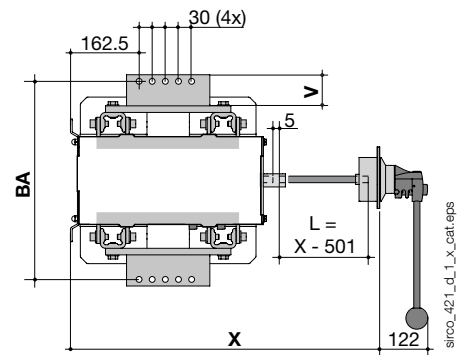


Rating (A) / Frame size		Overall dimensions	Switch body		Switch mounting					Connection					
SIRCO	SIRCO AC	C	F 3p.	F 4p.	M 3p.	M 4p.	N	O	P	T	V	AA	AB	AC	BA
4000 ... 5000 / B9	4000 / B9	514	695	695	660	660	98	115.5	75	120	86	160	292	482	452


## Dimensions - Front operation (continued)

### SIRCO 125 to 1600 A - 6 to 8 pole - B3 to B7

Direct front operation

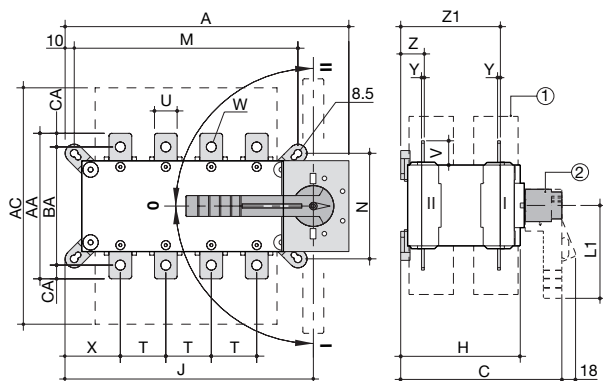

External front operation

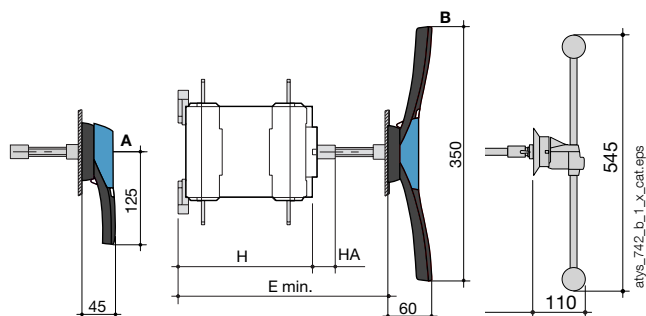

1. Terminal shroud
2. Handle for direct control:
  - 125 à 630 A : L1 = 140 mm
  - 800 à 1600 A : L1 = 210 mm

- A. S2 type handle for external control: From 125 to 160 A
- B. S4 type handle for external control: From 250 to 630 A
- C. V1 type handle for external control: From 800 to 1600 A

Rating (A) / Frame size	Perimeter dimensions				Terminal shroud	Boîtier				Fixations			Raccordement											
	A 3p.	A 4p.	C	E min		CA	H	HA	J 3p.	J 4p.	M 3p.	M 4p.	N	T	U	V	I	X 3p.	X 4p.	O	Z	Z1	AA	BA
125 / B3	221	251	218	208 ... 436	235	148	25	182	212	156	186	101	36	20	25	8,5	56	50	3,5	28	124	135	115	10
160 / B3	221	251	218	208 ... 436	235	148	25	182	212	156	186	101	36	20	25	8,5	56	50	3,5	28	124	135	115	10
200 / B3	221	251	218	208 ... 436	235	148	25	182	212	156	186	101	36	20	25	8,5	56	50	3,5	28	124	135	115	10
250 / B4	262	312	218	208 ... 436	280	148	25	223	273	196	246	116	50	25	30	11	61	61	3,5	30	124	160	130	15
315 / B4	262	312	218	208 ... 436	280	148	25	223	273	196	246	116	50	35	35	11	61	61	3,5	30	124	170	140	15
400 / B4	262	312	218	208 ... 436	280	148	25	223	273	196	246	116	50	35	35	11	61	61	3,5	30	124	170	140	15
500 / B5	319	379	295	285 ... 513	401	225	25	272	332	246	306	176	65	32	37	13	70,5	65,5	5	43	180	235	205	15
630 / B5	319	379	295	285 ... 513	400	225	25	272	332	246	306	176	65	45	50	13	70,5	65,5	5	43	180	260	220	20
800 / B6	386	466	375	425 ... 577	459	298	29	306,5	386,5	255	336	250	80	50	60,5	15	48	48	7	66,5	253,5	321		26,5
1000 / B6	386	466	375	425 ... 577	459	298	29	306,5	386,5	255	336	250	80	50	60,5	15	48	48	7	66,5	253,5	321		26,5
1250 / B6	386	466	375	425 ... 577	459	298	29	306,5	386,5	255	336	250	80	60	65	16x11	48	48	7	66,5	255,5	330		29,5
1600/B7	478	598	375	425 ... 577	461	298	29	388,5	518,5	347	467	250	120	90	43,5	12,5x5	54	54	8	66,5	255,5	288		15

# SIRCO


## Load break switches for power distribution

from 125 to 5000 A

### Dimensions - Side operation

#### SIRCO 125 à 630 A - B3 à B5


Exterior right side operation

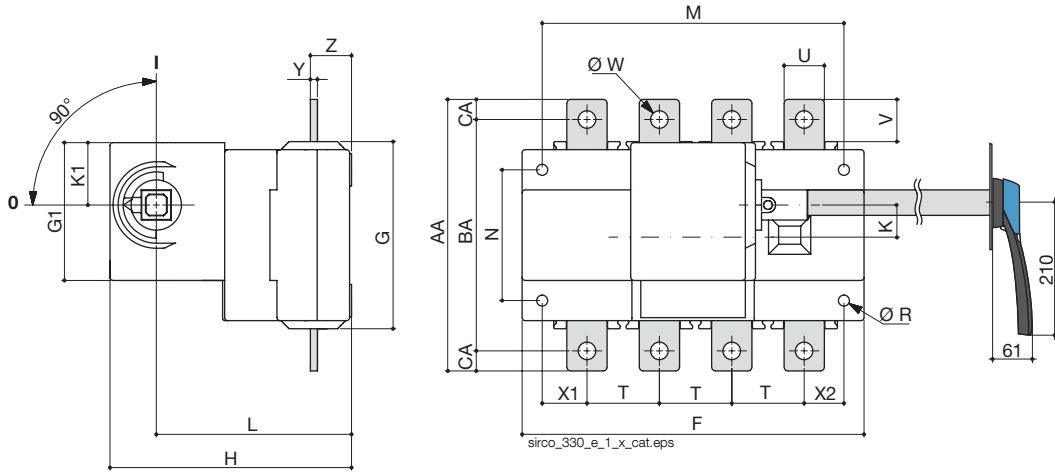

Calibre (A) / Taille du boîtier	Case				Mounting accessory								Connection											
	F 3p.	F 4p.	G	G1	H	K	K1	L	M 3p.	M 4p.	N	R	T	U	V	W	X1 3p.	X1 4p.	X2	Y	Z	AA	BA	CA
125 ... 160 / B3	140	170	93	69	120	15	31	97	120	150	65	5,5	36	20	25	9	28	22	20	3,5	20,5	135	115	10
200 ... 250 / B4	180	230	108		130	20		108	160	210	80		50	25	21,5	11	33	33	27		22,5	160	130	15
315 ... 400 / B5	230	290	170		165	29		142	210	270	140	7	65	32	29	13	42,5	37,5	37,5	5	36	235	205	
500 / B5					45	41,5	260	220	20															
630 / B5																								

#### SIRCO 800 à 1800 A - B6 à B7







Exterior right side operation

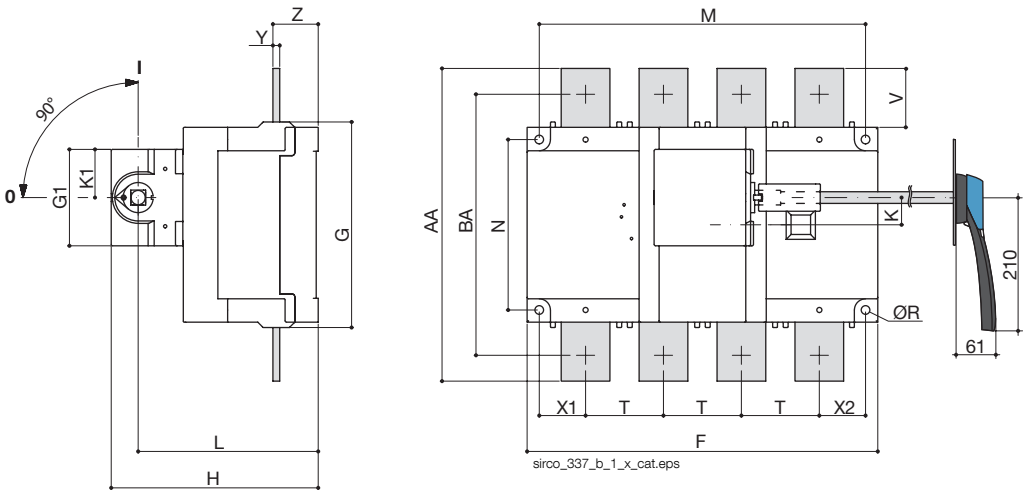







Rating (A) / Frame size	Case				Mounting accessory								Connection							
	F 3p.	F 4p.	G	G1	H	K	K1	L	M 3p.	M 4p.	N	R	T	V	X1	X2	Y	Z	AA	BA
800 / B6	280	360	211	99	213	28	50	185	255	335	175	9	80	60,5	47,5	47,5	7	46,5	321	268
CD 1 250 / B6									65					330	271					
1800 / B7									372	492						347	467			120

## Dimensions for external handles

### B3 to B5

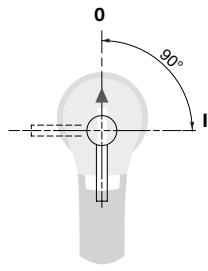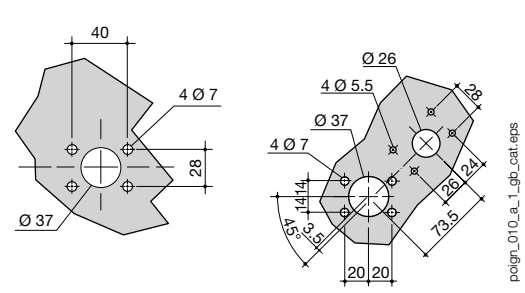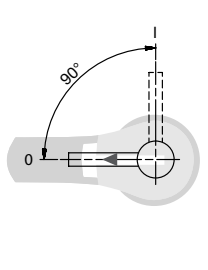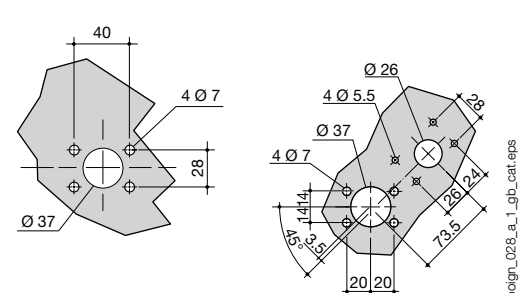Handle type	Front operation Direction of operation	Door drilling
<p><b>S2 type</b></p> 		<p>With lock RONIS EL11AP</p> 
<p><b>S2 type</b></p> 		<p>With lock RONIS EL11AP</p> 

### B6 - B7
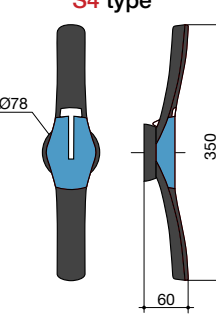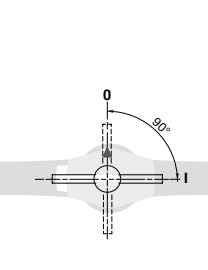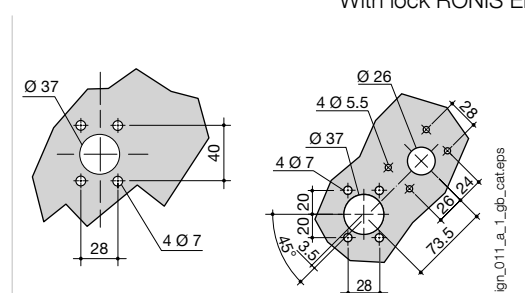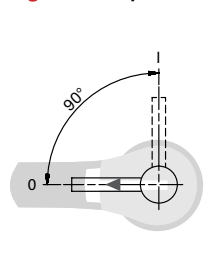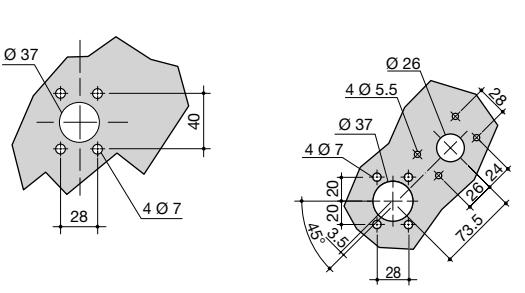
<p><b>S4 type</b></p> 		<p>With lock RONIS EL11AP</p> 
<p><b>S3 type</b></p> 	<p><b>Right side operation</b></p> 	<p>With lock RONIS EL11AP</p> 







# SIRCO

Load break switches for power distribution




from 125 to 5000 A

Dimensions for external handles

## B7 - B8

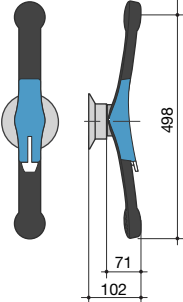Handle type	Front operation Direction of operation	Door drilling
<p><b>V2 type</b></p> 		 <p>poign_055_a_2_gb_cat.eps</p>
<p><b>S5 type with V Escutcheon</b></p> 		 <p>poign_020_a_1_gb_cat.eps</p>


## B9

Handle type	Front operation Direction of operation	Door drilling
<p><b>S0 type</b></p> 		 <p>poign_008_a_1_gb_cat.eps</p>

## Connection terminals


### SIRCO 125 to 630 A and SIRCO AC 200 to CD 630 A

SIRCO



sirco\_454\_b\_1\_x\_cat.eps

SIRCO AC




sirco\_451\_b\_1\_x\_cat.eps

Rating (A)				
SIRCO	SIRCO AC	U	V	W
125 ... 160		20	25	9
200 ... 250	200 ... 250	25	21.5	11
	315	35		
315 ... 400	400 ... 500	32	29	13
500				
630	CD 630	45	41.5	


### SIRCO 800 to 1000 A and SIRCO AC 630 to 1000 A

SIRCO

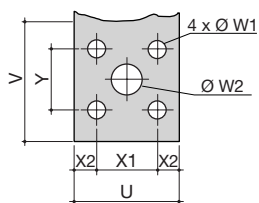

sirco\_452\_b\_1\_x\_cat.eps

SIRCO AC

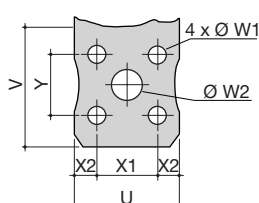


sirco\_453\_b\_1\_x\_cat.eps

Rating (A)								
SIRCO	SIRCO AC	U	V	W1	W2	X1	X2	Y
800 ... 1000	630 ... 1000	50	60.5	9	15	33	8.5	33


### SIRCO and SIRCO AC CD 1250 A

SIRCO

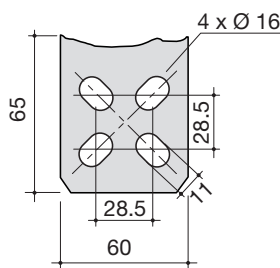

sirco\_270\_f\_1\_x\_cat.eps


SIRCO AC

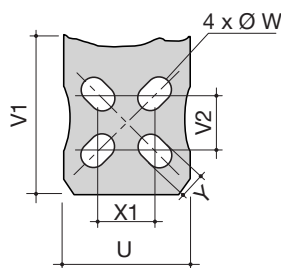

sirco-ac\_002\_c\_1\_x\_cat.eps

Rating (A)							
SIRCO	SIRCO AC	U	V1	V2	W	X1	Y
CD 1250 A	CD 1250 A	60	65	28.5	16	28.5	11


### SIRCO 1250 to 3200 A and SIRCO AC 1250 to 2000 A

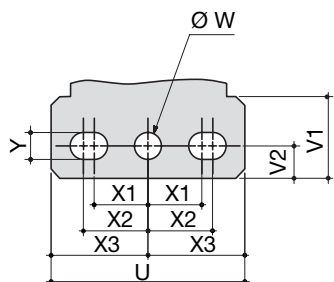

sirco\_455\_a\_1\_x\_cat.eps

Rating (A)									
SIRCO	SIRCO AC	U	V1	V2	W	X1	X2	X3	Y
1250 ... 3200	1250 ... 2000	90	35.8	15	12.5	25	30	45	12.5

### SIRCO 4000 to 5000 A

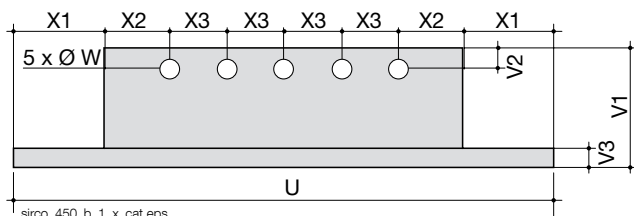

sirco\_450\_b\_1\_x\_cat.eps

Rating (A)									
SIRCO	SIRCO AC	U	W	X1	X2	X3	V1	V2	V3
4000 ... 5000	4000	286	13	48	35	30	86	15	15